
# SCM363B6W

FLUSH MOUNTING APPLIANCE INLET
63A 2P 3W 6h 200-250V 50/60Hz
120X120MM Screw terminals

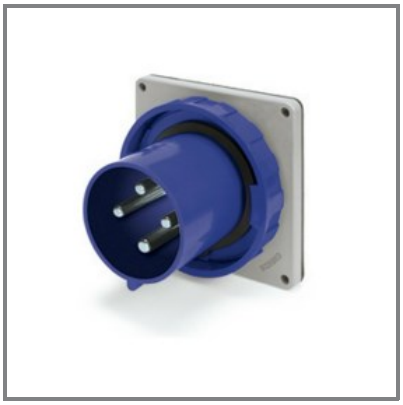

* Product image may be indicative

IEC 60309-1 (2021)
IEC 60309-2 (2021)
Low voltage direct. 2014/35/EU

## GENERAL CHARACTERISTICS

| | |
|---|---|
| Commercial Series | EUREKA-HD[UL] Series |
| Synthetical description | FLUSH MOUNTING APPLIANCE INLET |
| Description | |

The EUREKA-HD[UL] Series flush mounting appliance inlet is engineered for high-performance electrical applications. Designed to accommodate a rated voltage of 200-250V and a rated current of 63A, it ensures consistent power delivery. Featuring a 2P 3W configuration with a 6h hour position, it is compatible with both 50Hz and 60Hz working frequencies. The inlet offers robust protection with an IP67 rating, effectively guarding against dust and water ingress. Equipped with screw terminals, it facilitates secure and efficient connections. Available in a 90° angled outlet type, this appliance inlet is a reliable choice for demanding industrial environments.

| | |
|---|---|
| Mounting version | FLUSH MOUNTING |

## TECHNICAL CHARACTERISTICS

| | |
|---|---|
| Rated current | 63A |
| Poles | 2P 3W |
| Hour position | 6h |
| Rated voltage | 200-250V |
| Working frequency | 50/60Hz |
| Terminals | Screw terminals |

## PHYSICAL CHARACTERISTICS

| | |
|---|---|
| Mounting version | FLUSH MOUNTING |
| Colour | BLUE |
| Material | THERMOPLASTIC |
| Protection degree | Watertight |
| Protection degree IP | IP67 |
| Protection degree IK | IK10 |
| Types of available outlets | 90° ANGLED |
| Contact material | CuZn (brass) |
| Surface treatment contacts | Nickel-plated |

## DIMENSIONAL CHARACTERISTICS

| | |
|---|---|
| Flange | 120X120MM |

## DOWNLOAD

Technical drawing [PDF]
Technical drawing [STP]
Technical drawing [DWG]